

# ALUPROFF 1500



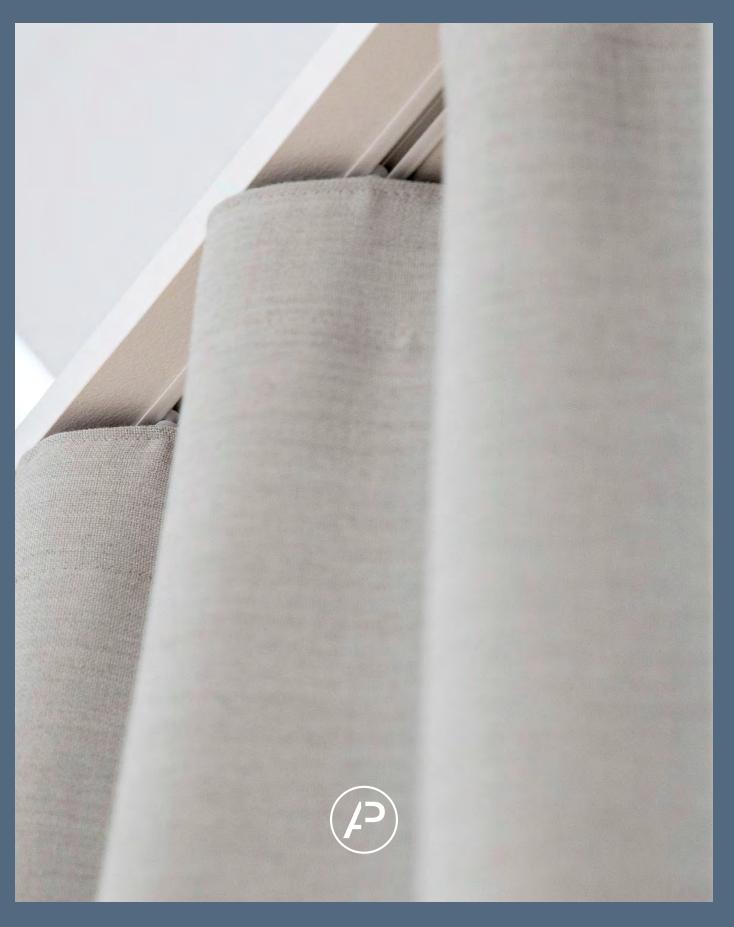



### 1500

Built-in rail to fit into ceiling recess. Gives a modern, extravagant look with floor-to ceiling fabric. Delivered in lengths of 6 meter. AP 1500 can be bent and curved.

#### **SPECIFICATIONS**

- Profile no: 1500
- Use: Curtain rail for installation in ceiling or panel
- Mounting: Milling directly into the ceiling
- Material: Aluminium alloy 6060/T6
- Powdercoating: 100 130 my
- Accessories: Plastic/metal
- Track width: 6,0 mm
- Ext. dimens.: 20 mm x 13 mm
- Length: 6000 mm
- Max. load: 4.5 15 kg (see sep. table)
- Bending: Min. radius 16 (recommended)
- Webster: No. B minimum 11
- Recommended glider: 5721, 5722, 5738, 5734,
- Recommended wave glider: 5735, 5730 14058, 6025
- Colours: White, black


All NCS & standard RAL colours available per request at additional cost.

#### MOUNTING OPTIONS

MOUNTED DIRECTLY INTO THE CEILING

15 cm between holes

DUST COVER



We recommend that you deliver the rail to the contract site before the recess is made and we strongly recommend that you use the dust cover, 5016, to keep the rail clean from any construction material before use.

#### COLOURS





## ACCESSORIES / 1500

